


DKS Door Order Sheet

Fire Rated		
Std.	3 Hour (Standard)	90 minutes on 1100 and 9000
Extra Charge: 20, 45, 60, or 90 min. (Specify)		

Lock and Hinge Locations	
DKS	Standard
CU	Curries
CE	Ceco
REP	Old Republic
DE	Dean Steel, Mesker, New Republic
PIO	Pioneer

Series		Cores
1100	Corner Seam	Polystyrene
1300	Steel Stiffened (18 ga.)	Mineral wool
1600	16 ga. Flush	Polystyrene
1700	18 ga. 6 Panel	Polystyrene
1800	18 ga. Flush	Polystyrene
1900	18 ga. 2 Panel	Polystyrene
2000	18 ga. Flush	Honeycomb
6000	18 ga. Double Egress	Honeycomb
9000	18 ga. Temp Rise	Mineral/Pyrophobic

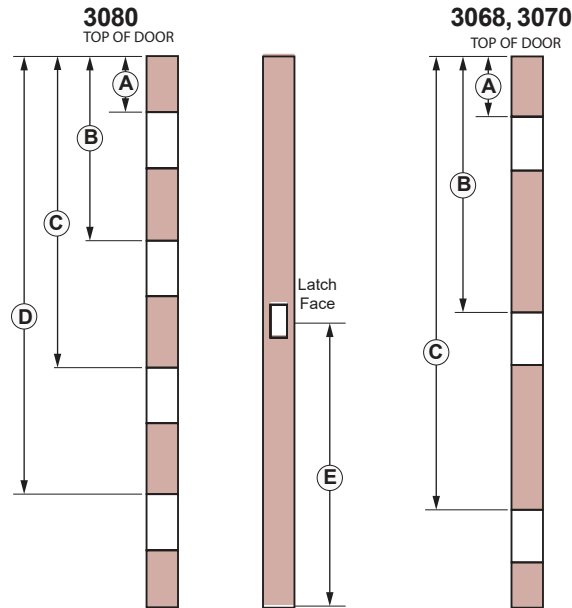

Hardware Prep	
C	161
MB	86
BR	Blank Rim Panic
SVR	Surf. Vert. Rod
IA	Fl. Blt. X ASA

Special Modifications		
LDMOD-9	Dead bolt prep (specify location)	
LDMOD-23	Peephole prep (specify location)	
LDMOD-11	Weld flat astragal (specify handing)	
Door Cutout		
Cutout Size	Cutout Location	Fire Rated (Y/N)

DKS Standard Door Measurements					
	A	B	C	D	E
3068	7 ³ / ₈	37 ⁵ / ₁₆	67 ¹ / ₄	-----	39 ⁹ / ₁₆
3070	7 ³ / ₈	39 ⁵ / ₁₆	71 ¹ / ₄	-----	
3080	7 ³ / ₈	32 ¹¹ / ₁₆	58	83 ⁵ / ₁₆	

[illegible]

