





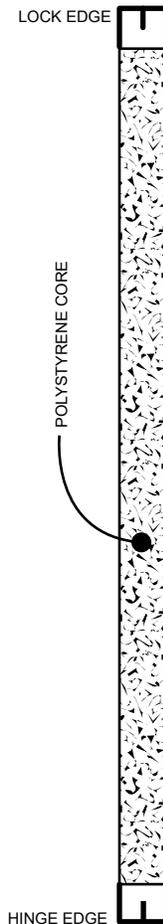
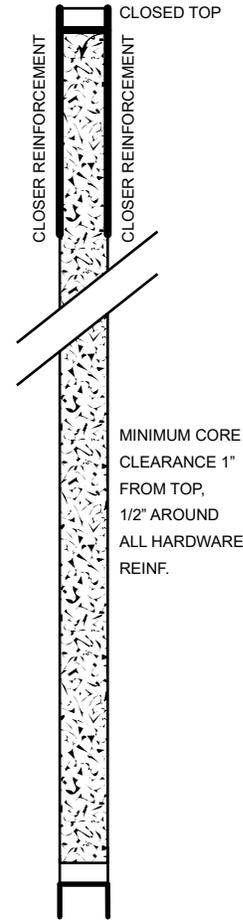


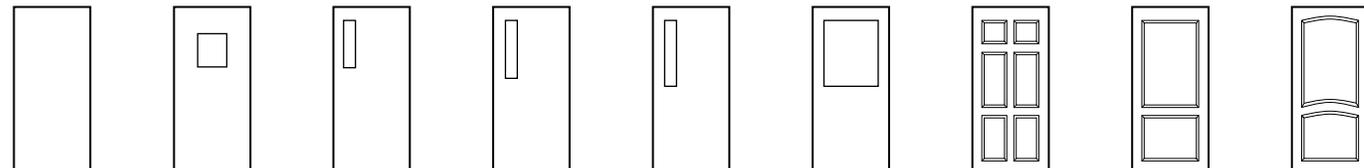

<p><b>Standard Features</b></p> <ul style="list-style-type: none"> <li>◆ 20-Gauge Cold Rolled or Galvanized Steel</li> <li>◆ <b>Seamless</b> Filled Edges</li> <li>◆ Full Body Polystyrene Core</li> <li>◆ Non- Handed Design</li> <li>◆ 12-Gauge Closer Reinforcement</li> <li>◆ 7-Gauge Hinge Reinforcement- Reversible</li> <li>◆ 16-Gauge Flush Top Cap - Galvanized Standard / Heavy Duty</li> <li>◆ 16-Gauge Inverted Bottom Cap - Galvanized</li> <li>◆ Prime Painted Grey Two Part Epoxy Factory Applied, Baked On</li> <li>◆ Standard Lock Preparations Include 161, Fed 86 Edge, Panic Bar Reinforced</li> <li>◆ WHI / ITS up to 3 hour, Positive Pressure and "S" Smoke included</li> <li>◆ Meets or Exceeds Standards for ANSI 250.4 and ANSI 250.8</li> <li>◆ Continuous Laser Weld on Both Edges</li> </ul>	<p><b>Typical Hardware Preparations</b></p>  <p>ANSI / SDI A115.1 "MB" (MORTISE)</p>  <p>NON-HANDED HINGE</p>  <p>ANSI / SDI A115.2 "C" (BORED)</p>  <p>UNIVERSAL STRIKE A115.1 "U"</p>	<p><b>Sections</b></p>  <p>LOCK EDGE</p> <p>HINGE EDGE</p>  <p>POLYSTYRENE CORE</p> <p>CLOSER REINFORCEMENT</p> <p>CLOSER REINFORCEMENT</p> <p>MINIMUM CORE CLEARANCE 1" FROM TOP, 1/2" AROUND ALL HARDWARE REINF.</p> <p>TOP VIEW</p> <p>TYPICAL SECTION</p>
 <p>F      V 10 x 10      N 5 x 20      N 4 x 25      N 3 x 33      HG      1700      1900      1900</p>		
 <p>VLI      N5LI      N4LI      N3LI      GLI      LI      TLI      L2</p>		

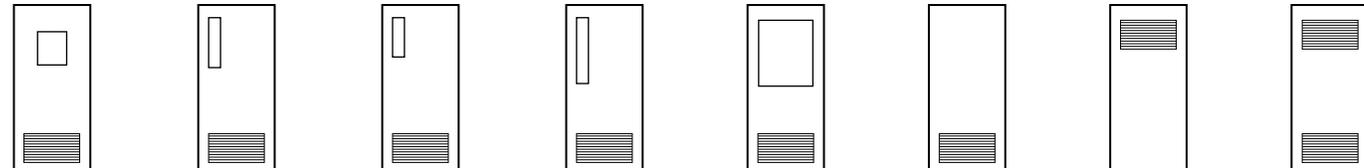