





Standard Features

- ◆ 18-Gauge Galvanized Steel or Cold Rolled Steel
- ◆ **Seamless** Filled Edges
- ◆ Full Body Polystyrene Core
- ◆ Handed Design
- ◆ 12-Gauge Closer Reinforcement
- ◆ 7-Gauge Hinge Reinforcement- Reversible
- ◆ 16-Gauge Flush Top Cap - Galvanized Standard / Heavy Duty
- ◆ 16-Gauge Inverted Bottom Cap - Galvanized
- ◆ Prime Painted Grey Two Part Epoxy Factory Applied, Baked On
- ◆ Standard Lock Preparations Include 161, Panic Bar Reinforced
- ◆ WHI / ITS up to 3 hour, Positive Pressure and "S" Smoke included
- ◆ Meets or Exceeds Standards for ANSI 250.4 and ANSI 250.8
- ◆ Continuous Laser Welded Both on Edges

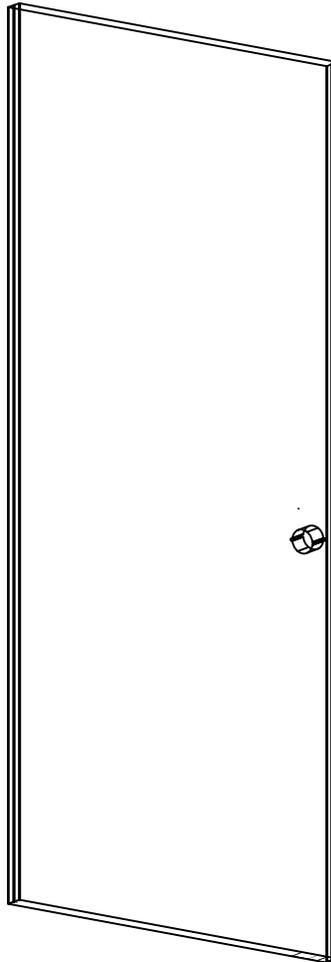

Sections

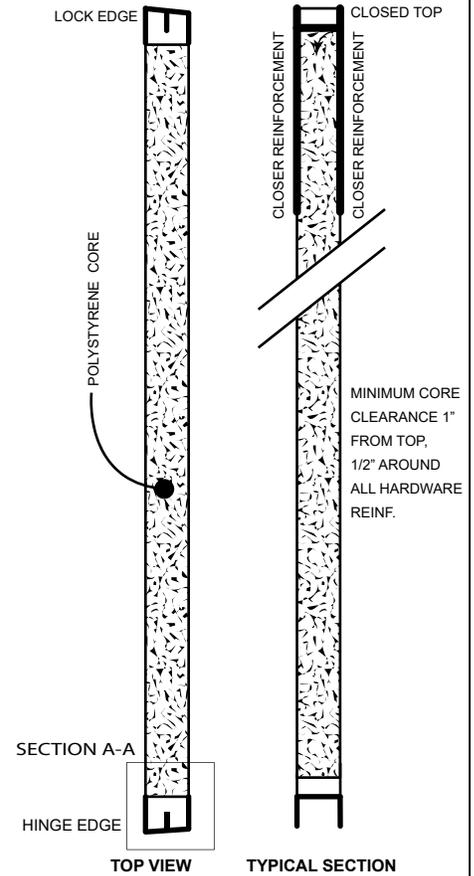

Typical Hardware Preparations

